

# AUGER DRIVES EXCAVATOR 13 - 16T (28,700lbs - 35,300lbs)



## 2-SPEED AUGER DRIVES

	TWO SPEED	
MODEL	13DDT	16DDT
Torque ft-lbs @ 3000 Psi	11,441	14,098
Max Torque ft-lbs @ 3500 Psi	13,347	16,448
Recommended Flow (Gpm)	16-53	20-53
Motor Type	EATON	EATON
Max Pressure - Do Not Exceed	3500psi @ 33gpm	
Max Flow - Do Not Exceed	53gpm @ 2200psi	
Max Horse Power	67	67
Pressure Relief Valve	Included	Included
Standard Output Shaft	3" Hex	3" Hex
Recommended Auger	A8 / RC8 / RC10	A8 / RC8 / RC10
Max Auger Diameter Clay/shale**	36"	48"
Max Auger Diameter Earth**	60"	60"
Weight (lbs)	394	394
Overall Length (in)	38.6"	38.6"
Diameter (in)	14.4"	14.4"

### ESSENTIALLY 2 DRIVE UNITS IN ONE

Save time and money by eliminating the need for multiple drive units.

#### LOW SPEED - HIGH TORQUE

Ideal for drilling with large diameter augers or hard fracturable rock.

#### HIGH SPEED - LOW TORQUE

Ideal for small diameter augers or softer soils where speed is needed.

Switch to high speed for added spin off speed for clearing larger diameter augers.

### FEATURES

- Compact high torque Digga gearbox
- Fitted with high efficiency Eaton VIS motor
- Integrated PRV (Pressure Relief Valve)
- Extreme duty shaft locking system
- Low maintenance with 5 year gear box and 3 year motor warranty



**FOR BETTER DRILLING ACCURACY  
ADD DIGGALIGN** (Sold Separately)



13DDT						16DDT					
OUTPUT SPEED			OUTPUT TORQUE			OUTPUT SPEED			OUTPUT TORQUE		
GPM	HI TORQUE LOW SPEED	LO TORQUE HIGH SPEED	PSI	HI TORQUE LOW SPEED	LO TORQUE HIGH SPEED	GPM	HI TORQUE LOW SPEED	LO TORQUE HIGH SPEED	PSI	HI TORQUE LOW SPEED	LO TORQUE HIGH SPEED
16	13	19	1,000	3,814	2,517	20	13	20	1,000	4,699	3,102
26	21	32	1,500	5,720	3,775	30	20	30	1,500	7,049	4,652
36	29	44	2,000	7,627	5,034	40	26	40	2,000	9,399	6,203
46	34	56	2,500	9,534	6,292	53	35	52	2,500	11,749	7,754
53	43	65	3,000	11,441	7,551				3,000	14,098	9,305
			3,500	13,347	8,809				3,500	16,448	10,856

Output speed and torque specifications are THEORETICAL. Speed and torque output are dependent on the overall system efficiencies associated with the prime movers hydraulic system. This document should be used for information and comparative purposes only. When determining criteria, & application specific information is required, please contact DIGGA.

(\*) Max/min drilling diameter (DIA) dependant on ground conditions. Guide is a recommendation only.

# AUGERS TO SUIT 13DDT & 16DDT



## FEATURES

- TRU-CUT – a 12" auger cuts a 12" hole, no more oversized holes!
- Over 30 years of auger design and manufacture has resulted in an extremely efficient cutting head design and optimum flight pitches to provide maximum soil removal in all ground conditions.
- Made in the USA
- Easy knock in and out teeth requires no special tools


## GENERAL PURPOSE AUGER

- Dig holes in earth conditions and clay
- Available Size, 6" to 60"
- 60" Overall length
- Earth and Tungsten Teeth Available



## COMBINATION ROCK & EARTH AUGER

- Dig holes in earth conditions, clay, asphalt, concrete and fracturable rock
- All purpose cutting heads - no more interchanging cutting heads & using multiple augers
- Available Size, 6" to 60"
- 60" Overall length

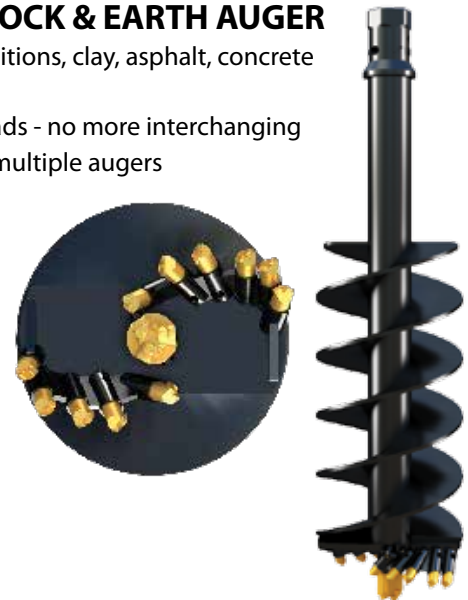

## SCREW ANCHOR APPLICATIONS

**Digga's auger drives can be converted to screw anchor drives in 3 easy steps with the addition of our patented 'Anti Kickback Valve'.** The valve controls the rapid decompression of oil which occurs during pile installation. A pile builds up rotational energy, somewhat like a rubber band on a wind up model plane. The pile momentarily kicks back, forcing energy back up the pile through the drive shaft to the gear box, through the hydraulic motor.

This action momentarily causes the motor to effectively turn into a high speed pump, potentially causing costly motor failure. Fitted to the drive manifold, the Anti Kickback Valve controls this release of energy.

Digga's 5 year gearbox and 3 year motor warranty does not allow to auger drives which are used for screw anchoring and not fitted with an Anti Kickback Valve.

### EASY FITMENT OF THE OPTIONAL SWOOSH VALVE FOR SCREW ANCHORING APPLICATIONS

① Remove elbow fittings.

② Place washer spacers on the top valve ports of motor. Align valve block with spacers and top valve ports.

③ Screw in bolts through the valve block and top valve ports of motor.

