

# AUGER DRIVES HIGH FLOW SKID STEER LOADER 4.5 - 8T (9,900lbs - 17,600lbs)



## 2-SPEED AUGER DRIVES

	TWO SPEED	
MODEL	5DDT	6DDT
Torque ft-lbs @ 3000 Psi	4,067	5,012
Max Torque ft-lbs @ 3500 Psi	4,745	5,847
Recommended Flow (Gpm)	10-36	10-36
Motor Type	EATON	EATON
Max Pressure - Do Not Exceed	3500psi @ 27gpm	
Max Flow - Do Not Exceed	53gpm @ 1800psi	
Max Horse Power	55	55
Pressure Relief Valve	Included	Included
Standard Output Shaft	2.5" Hex	2.5" Hex
Recommended Auger	A6 / RC6	A6 / RC6
Max Drilling Diameter Clay/shale**	24"	30"
Max Drilling Diameter Earth**	40"	40"
Weight (lbs)	350	350
Overall Length (in)	34.4"	34.4"
Diameter (in)	13.4"	13.4"

**FOR BETTER DRILLING ACCURACY  
ADD DIGGALIGN** (Sold Separately)



### ESSENTIALLY 2 DRIVE UNITS IN ONE

Save time and money by eliminating the need for multiple drive units.

#### LOW SPEED - HIGH TORQUE

Ideal for drilling with large diameter augers or hard fracturable rock.

#### HIGH SPEED - LOW TORQUE

Ideal for small diameter augers or softer soils where speed is needed.

Switch to high speed for added spin off speed for clearing larger diameter augers.

### FEATURES

- Compact high torque Digga gearbox
- Fitted with high efficiency Eaton VIS motor
- Integrated PRV (Pressure Relief Valve)
- Extreme duty shaft locking system
- Low maintenance with 5 year gear box and 3 year motor warranty



### OUTPUT SPEED & TORQUE

5DDT						6DDT					
OUTPUT SPEED			OUTPUT TORQUE			OUTPUT SPEED			OUTPUT TORQUE		
GPM	HI TORQUE LOW SPEED	LO TORQUE HIGH SPEED	PSI	HI TORQUE LOW SPEED	LO TORQUE HIGH SPEED	GPM	HI TORQUE LOW SPEED	LO TORQUE HIGH SPEED	PSI	HI TORQUE LOW SPEED	LO TORQUE HIGH SPEED
10	23	34	1,000	1,356	895	10	18	28	1,000	1,671	1,103
20	45	69	1,500	2,034	1,342	20	37	56	1,500	2,506	1,654
30	68	103	2,000	2,711	1,790	30	55	83	2,000	3,341	2,205
36	81	123	2,500	3,389	2,237	36	66	100	2,500	4,177	2,757
			3,000	4,067	2,684				3,000	5,012	3,308
			3,500	4,745	3,132				3,500	5,847	3,859

Output speed and torque specifications are THEORETICAL. Speed and torque output are dependent on the overall system efficiencies associated with the prime movers hydraulic system. This document should be used for information and comparative purposes only. When determining criteria, & application specific information is required, please contact DIGGA.

(\* ) Max/min drilling diameter (DIA) dependant on ground conditions. Guide is a recommendation only.

# AUGERS TO SUIT 5DDT & 6DDT



## FEATURES

- TRU-CUT – a 12" auger cuts a 12" hole, no more oversized holes!
- Over 30 years of auger design and manufacture has resulted in an extremely efficient cutting head design and optimum flight pitches to provide maximum soil removal in all ground conditions.
- Made in the USA
- Easy knock in and out teeth requires no special tools


## GENERAL PURPOSE AUGER

- Dig holes in earth conditions and clay
- Available Size, 6" to 60"
- 60" Overall length
- Earth and Tungsten Teeth Available



## COMBINATION ROCK & EARTH AUGER

- Dig holes in earth conditions, clay, asphalt, concrete and fracturable rock
- All purpose cutting heads - no more interchanging cutting heads & using multiple augers
- Available Size, 6" to 60"
- 60" Overall length

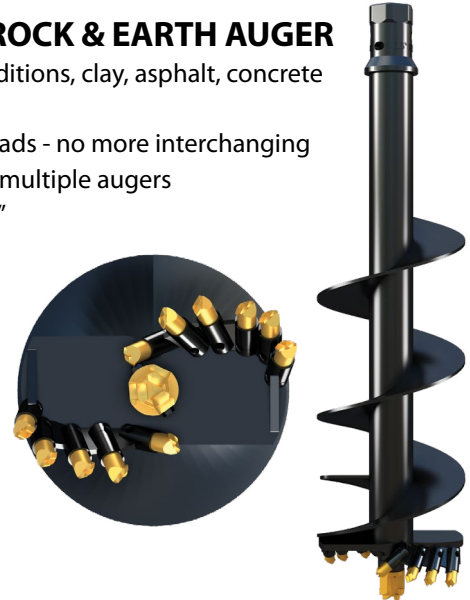

## SCREW ANCHOR APPLICATIONS

### DIGGA OFFERS A FULL RANGE OF 2 SPEED ANCHOR DRIVES SPECIFICALLY DESIGNED FOR HELICAL PILE AND SCREW ANCHORING APPLICATIONS.


Developed in conjunction with leading screw anchor / helical pile installers around the world, Digga brings you the only true anchor drives available. Designed and manufactured in-house specifically for the rigours of the application.

## FEATURES

- Fitted with ECV (Energy Control Valve) to prevent rapid decompression of oil, caused by the reverse energy created by pile kick-back.
- Fitted with high efficiency Eaton VIS motor
- Integrated PRV (Pressure Relief Valve)
- Extreme duty shaft locking system
- Low maintenance with 3 year gearbox and 2 year motor warranty

NOT AVAILABLE FOR RETROFIT ON  
2 SPEED DRILLING DRIVES

## ENERGY CONTROL VALVE



*This revolutionary bypass valve is fitted to the drive to control the rapid decompression of oil caused by pile kick-back during the screw anchoring process.*

